



BRIGHTNESS CONTROLLER GE 255/13 FOR MOUNTING
IN LIGHTS

Similar to image

Technical data:		
Depth	mm	20
Bus system / can be used / EIB/KNX		Yes
Bus system / usable / RF bus system		No
Bus system / usable / Powernet bus system		No
Bus system / usable / LON bus system		No
Bus system / others / suitable for use		Without
Adjustable light sensitivity		
• initial value	lx	0
• final value	lx	2,000
Design of the sensor		Light sensor integrated
Type of mounting		Miscellaneous
Type of display / LED		No
Product component / integrated / Bus coupling		Yes
Protection class IP		IP20

Certificates/approvals:



Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5WG1255-4AB13/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5WG1255-4AB13

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

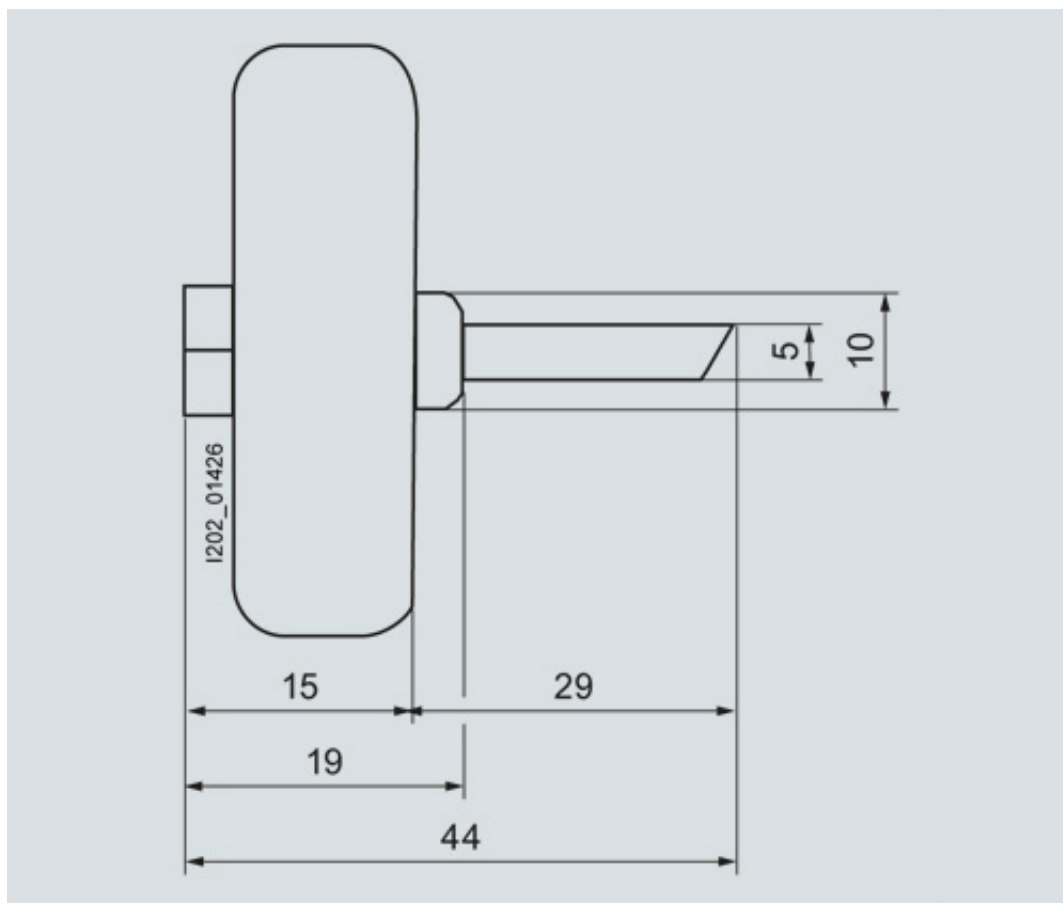

last change:

May 16, 2013