



Product information

ASBS 4/LED 5-4

Industrial Connecting Solutions:I/O Modules:Passive distributors:M12 Passive Distributors:pluggable:with LED:1 signal/socket (3+PE):4-ports:ASBS 4/LED 5-4

<http://www.e-catalog.beldensolutions.com/link/57078-24228-255441-199791-200292-204939-204943-204956-205310-205311/en/conf/uistate>


Name		ASBS 4/LED 5-4
		
		Pluggable actuator/sensor distribution box, 4 port version, with LED operation and function indicators, combined FIXCOM/M12 socket, 4-pole, 1 signal per socket, earth connection, M23 connection for the control cable.
Delivery informations		
Availability	available	
Product description		
Type	ASBS 4/LED 5-4	
Order No.	11126	
Description	Pluggable actuator/sensor distribution box, 4 port version, with LED operation and function indicators, combined FIXCOM/M12 socket, 4-pole, 1 signal per socket, earth connection, M23 connection for the control cable.	
Number of contacts	4 (M12)	
Version	4 ports	
Color of housing	orange	
Product characteristics	Vibration resistance, Oil resistance	
Classification		
Belden brand	Lumberg-Automation	
Mechanical data		
Thread	M12	
LED display present		
Environmental conditions		
Environmental temperature	-15 °C ... 80 °C	
Degree of protection (IP), mounted	IP67	
Pollution degree	3	
Materials		
Housing material / Molded body	TPU, self-extinguishing	
Contact bearer material	PA-GF, self-extinguishing	
Contact material	CuZn	
Contact material - Surface refinement	pre-nickelated and 0.8 microns gold-plated	
Knurled screw / nut material	CuZn, nickel-plated	
Sealing material	FKM	
Electrical data		
Contact resistance	≤ 5 mΩ	
Rated current In	4 A per socket / 12 A max. at 40°C	
Nominal voltage	10 - 30 V DC	
Rated voltage	32 V	
Insulation resistance	> 1 GΩ	
Approvals		
Approvals	cURus	
Scope of delivery and accessories		
Scope of delivery	ZVK: 2 dust covers for unused sockets ZBS: 10 attachable labels	

Industrial Connecting Solutions:I/O Modules:Passive distributors:M12 Passive Distributors:pluggable:with LED:1 signal/socket (3+PE):4-ports:ASBS 4/LED 5-4

<http://www.e-catalog.beldensolutions.com/link/57078-24228-255441-199791-200292-204939-204943-204956-205310-205311/en/conf/ui/istate>

Picture

Drawing

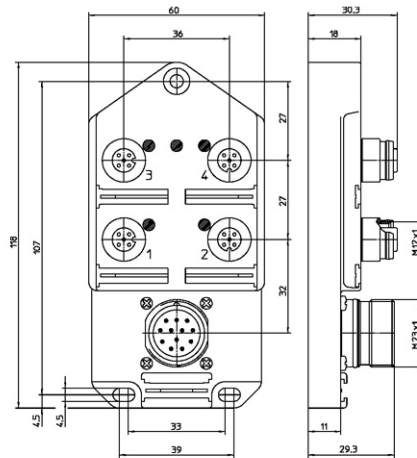

Belden Deutschland GmbH

Im Gewerbepark 2
58579 Schalksmühle
Germany
Phone: +49 7127/14-1806
E-Mail: icos-sales@belden.com

The information published in the websites has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price-related/commercial respect. The complete information and data were available on user documentation. Mandatory information can only be obtained by a concrete query.