

Product information

ASBS 8/LED 5-4

Industrial Connecting Solutions: I/O Modules: Passive distributors: M12 Passive Distributors: pluggable: with LED:1 signal/socket (3+PE):8-ports: ASBS 8/LED 5-4 http://www.e-catalog.beldensolutions.com/link/57078-24228-255441-199791-200292-204939-204943-204956-205271-205282/en/conf/uistate/ the state of thASBS 8/LED 5-4 Pluggable actuator/sensor distribution box, 8 port version, with LED operation and function indicators, combined FIXCOM/M12 socket, 4-pole, 1 signal per socket, earth connection, M23 connection for the control cable. **Delivery informations** Availability **Product description** ASBS 8/LED 5-4 Туре Order No Pluggable actuator/sensor distribution box, 8 port version, with LED operation and function indicators, combined FIXCOM/M12 socket, 4-pole, 1 signal per Description socket, earth connection, M23 connection for the control cable. Number of contacts 4 (M12) Version 8 norts Color of housing orange Product characteristics Vibration resistance, Oil resistance Classification Belden brand Lumberg-Automation Mechanical data Thread LED display present **4 Environmental conditions Environmental temperature** -15 °C ... 80 °C Degree of protection (IP), mounted Pollution degree 3 Materials Housing material / Molded body TPU, self-extinguishing PA-GF, self-extinguishing Contact bearer material Contact material Contact material - Surface refinement pre-nickeled and 0.8 microns gold-plated Knurled screw / nut material CuZn, nickel-plated Sealing material FKM **Electrical data** Contact resistance < 5 mΩ 4 A per socket / 12 A max. at 40°C Rated current In Nominal voltage 10 - 30 V DC Rated voltage 32 V Insulation resistance > 1 GΩ **Approvals** Approvals cURus



Scope of delivery and accessories

Scope of delivery

ZVK: 2 dust covers for unused sockets ZBS: 10 attachable labels




Industrial Connecting Solutions:I/O Modules:Passive distributors:M12 Passive Distributors:pluggable:with LED:1 signal/socket (3+PE):8-ports:ASBS 8/LED 5-4

http://www.e-catalog.beldensolutions.com/link/57078-24228-255441-199791-200292-204939-204943-204956-205271-205282/en/conf/uistate/link/57078-24228-255441-199791-200292-204939-204943-204956-205271-205282/en/conf/uistate/link/57078-24228-255441-199791-200292-204939-204943-204956-205271-205282/en/conf/uistate/link/57078-24228-255441-199791-200292-204939-204943-204956-205271-205282/en/conf/uistate/link/57078-24228-255441-199791-200292-204939-204943-204956-205271-205282/en/conf/uistate/link/57078-24228-255441-199791-200292-204939-204943-204956-205271-205282/en/conf/uistate/link/57078-24228-255441-199791-200292-204939-204943-204956-205271-205282/en/conf/uistate/link/57078-24228-255441-199791-200292-204939-204943-204956-205271-205282/en/conf/uistate/link/57078-24228-255441-199791-200292-204939-20490-20400-20400-20400-20400-20400-20400-20400-20400-20400-20400-20400-20400-20400-20400-20400-20400-20

Picture

Drawing

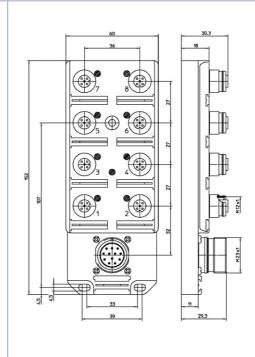

Belden Deutschland GmbH

Im Gewerbepark 2 58579 Schalksmühle Germany

Phone: +49 7127/14-1806 E-Mail: icos-sales@belden.com

The information published in the websites has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price-related/commercial respect. The complete information and data were available on user documentation. Mandatory information can only be obtained by a concrete query.

