

Product information N11R AM

Industrial Connecting Solutions:Circular Connectors:MIL, DIN, Universal Connectors:DIN 43651 Connectors (NR series):Panel-mounted connector:N11R AM

http://www.e-catalog.beldensolutions.com/link/57078-24228-256281-256284-24367-24372-36305/en/conf/uistate with the property of the property

N11R AM

	Panel-mounted connector with metal screw-in casing	
Delivery informations		
Availability	available	
Product description		
Description	Panel-mounted connector with metal screw-in casing	
Туре	N11R AM	
Order No.	932 626-106	
Type of contact	male	
Number of contacts	11 + PE	
Conductor size	max. 0.5 mm ²	
Standard	DIN 43651	
Housing Color	grey	
Technical data		
Pin dimensions	1.6 mm	
Rated voltage	AC/DC 60 V	
Rated current	5 A	
Contact resistance	<= 5 m0hm	
Type of termination	crimp	
Suitable cables	0.14 mm ² to 0.5 mm ²	
Mounting	PG 13,5	
Material		
Contact surface material	Ag	
Contact bearer material	PET	
Housing material	PET	
Environmental conditions		
Protection class (IEC 60529)	IP 65	
Temperature range	-40 °C to +90 °C	
Packing unit		
Packaging unit	10 pieces	
Scope of delivery and accessories		
Scope of delivery	1 panel-mounted connector, not assembled, in polythene bag with assembly instructions	
Accessories to order separately	can be plugged into N11R FF, N11R EF; protective cover SHK 2, order no. 733 845-001 contacts: RSC 162/1	






Industrial Connecting Solutions: Circular Connectors: MIL, DIN, Universal Connectors: DIN 43651 Connectors (NR series): Panel-mounted connector: N11R AM http://www.e-catalog.beldensolutions.com/link/57078-24228-256281-256284-24367-24372-36305/en/conf/uistate

Picture

Drawing

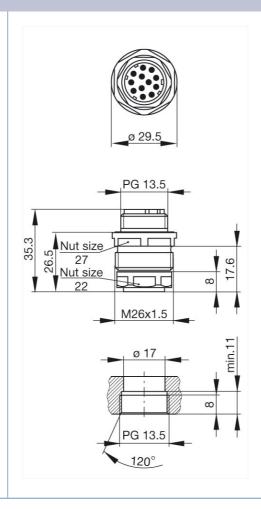

Belden Deutschland GmbH

Im Gewerbepark 2 58579 Schalksmühle Germany

Phone: +49 7127/14-1806 E-Mail: icos-sales@belden.com

The information published in the websites has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price-related/commercial respect. The complete information and data were available on user documentation. Mandatory information can only be obtained by a concrete query.

